

CAMSO BHL 753

FORMERLY SOLIDEAL BHZ



BACKHOE
LOADERS



DURABILITY MEETS RIDE QUALITY

Thoroughly designed to ensure even tread wearing and reduce vibrations. Comfort and long tire life combined.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



CAMSO

ROAD
FREE
COMPANY

CAMSO BHL 753



NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO

- Ensures even tread wearing for greater durability

OPTIMIZED, CONTINUOUS-CONTACT TREAD PATTERN

- Significantly reduces vibration for improved ride quality

NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO


- Protects against tread impacts and punctures

TAPERED TREAD LUGS

- Improves lug stability for even wearing

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]				
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]					Static	8 km/h 5 mph	16 km/h 10 mph	40 km/h 25 mph	50 km/h 30 mph
12-16.5	12	TBLS	9.75	-	826	319	18	145	A2	5.60	-	4550	2880	2280	-	-
					32.5	12.6	23			10050		6350	5050	-	-	
12.5/80-18 (320/80-18)	12	TBLS	W9x18	11x18	984*	310*	24*	129	A6	3.70	Drive	4375	2410	2240	1665	-
		38.7			12.2	30	9650			5300		4950	3700	-		
		TBLS	-	984*	310*	24*	142	3.70		Free rolling	4375	3450	3205	2385	-	
		38.7		12.2	30	9650		7600			7100	5250	-			
19.5L-24 (500/70-24)	12	TBLS	DW16Ax24	W16x24	1316*	503*	25*	151	A8	2.30	Cyclic	7935	5240	4625	3450	3140
		51.8			19.8	31	17500			11550		10200	7600	6950		
		TBLS	-	1316*	503*	25*	-	2.30		Constant	7935	4450	3900	3450	3140	
		51.8		19.8	31	17500		9800			8600	7600	6950			
18.4-26 (480/80-26)	12	TBLS/TT	W16Lx26	DW16A. W15Lx26	1418*	482*	26*	156	A8	2.50	Cyclic	9200	5840	5360	4000	3640
		55.8			19.0	33	20300			12900		11850	8850	8050		
		TBLS/TT	-	1418*	482*	26*	-	2.50		Constant	9200	4830	4520	4000	3640	
		55.8		19.0	33	20300		10650			10000	8850	8050			
16.9-28 (440/80-28)	12	TBLS/TT	W15Lx28	W14Lx28	1404*	445*	28*	152	A8	2.60	Cyclic	8165	5180	3800	3550	3230
		55.3			17.5	35	18000			11450		8400	7850	7150		
		TBLS/TT	-	1404*	445*	28*	-	2.60		Constant	8165	4290	3690	3550	3230	
		55.3		17.5	35	18000		9450			8150	7850	7150			


MASSIVE UNDERTREAD CONNECTING CENTER LUGS

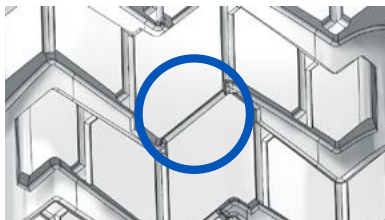

Vibration performance

Off-road traction

Impact resistance tread



Life estimation

Impact resistance sidewall

- CAMSO BHL 753
- COMPETITOR

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL