

# CAMSO WHL 753R

FORMERLY SOLIDEAL SRGP



WHEEL  
LOADERS



MOTOR  
GRADERS



ARTICULATED  
DUMP TRUCKS



## RADIAL PERFORMANCE, VERSATILITY AND DURABILITY

Delivers excellent performance, versatility and durability. With enhanced stability, ride quality and traction, it's the best choice for both one-star and two-star applications.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



# CAMSO WHL 753R



## HEAVY-DUTY DUAL-STAR CARCASS

- Enhances stability and suitability for both one-star and two-star applications

## OFFSET, TAPERED TREAD LUGS

- Reduces vibration for improved ride quality



## OPTIMIZED TREAD PATTERN

- Provides excellent durability and low wear rate


## NON-DIRECTIONAL STEPPED DESIGN

- Enhances cleanout for improved traction

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			APPLI-CATION	SI	LI	INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb]										
			O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]				KPa	200	250	300	350	400	450	500	550	600	650
			PSI	29	36				44	51	58	65	73	80	87	94			
17.5R25	TBL5	14.00/1.5	1348	469	28	Loader*	A2	182	kg	3650	4250	4850	5600	6000	6500	7100	7500	8000	8500
							lb	8050	9350	10700	12300	13200	14300	15700	16500	17600	18700		
						EM**	B	167	kg	-	-	3550	4000	4375	4750	5150	5450 (5.25)	-	-
			53.1	18.5	35	Grader*	A8	153	kg	2650	3075	3650	4000	4375	4750	-	-	-	-
							lb	5840	6800	8050	8800	9650	10500	-	-	-	-		
						EM**	B	177	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
20.5R25	TBL5	17.00/2.0	1492	548	33	Loader*	A2	193	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
							lb	10500	12300	13900	15700	17600	19300	20900	22000	24000	25400		
						EM**	B	177	kg	-	-	4750	5300	5800	6500	6900	7300 (5.25)	-	-
			58.7	21.6	42	Grader*	A8	161	kg	3450	4125	4625	-	-	-	-	-	-	
							lb	7600	9100	10200	-	-	-	-	-	-	-		
						EM**	B	177	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
23.5R25	TBL5	19.50/2.5	1615	624	35	Loader*	A2	201	kg	6000	7100	8250	9250	10300	11200	12150	12850	13600	14500
							lb	13200	15700	18200	20400	22700	24700	26800	28300	30000	32000		
						EM**	B	185	kg	-	-	6000	6700	7500	8250	9000	9250 (5.25)	-	-
			63.6	24.6	44	Grader*	A8	170	kg	4500	5300	6000	-	-	-	-	-	-	
							lb	9900	11700	13200	-	-	-	-	-	-	-		
						EM**	B	185	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
26.5R25	TBL5	22.00/3.0	1746	704	40	Loader*	A2	209	kg	7500	9000	10300	11500	12850	14000	15000	16000	17000	18500
							lb	16500	19800	22700	25400	28300	30900	33100	35300	37500	40800		
						EM**	B	193	kg	-	-	7500	8500	9500	10300	11200	11500 (5.25)	-	-
			68.7	27.7	50	Grader*	A8	170	kg	4500	5300	6000	-	-	-	-	-		
							lb	9900	11700	13200	-	-	-	-	-	-			
						EM**	B	193	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
29.5R25	TBL5	25.00/3.5	1870	782	40	Loader*	A2	216	kg	-	-	-	-	15500	17000	18000	19500	20600	22400
							lb	-	-	-	-	34200	37500	39700	43000	45400	49400		
						EM**	B	200	kg	-	-	9250	10300	11500	12500	13600	15000 (5.25)	-	-
			73.6	30.8	50	Grader*	A8	170	kg	4500	5300	6000	-	-	-	-	-		
							lb	9900	11700	13200	-	-	-	-	-	-			
						EM**	B	200	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500


### NEW TIRE

Lug-to-void: 55%

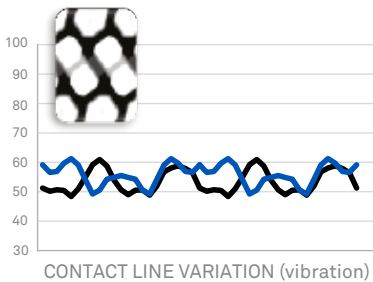

### 25% WORN TIRE

Lug-to-void: 65%

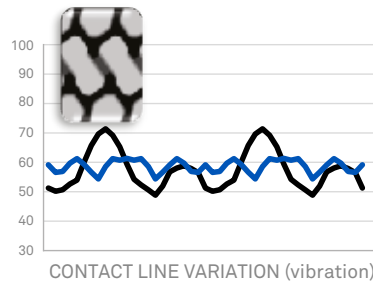

■ CAMSO WHL 753R

■ COMPETITOR 1

**Patented tread design to minimize vibrations:**  
 Poor ride quality caused by high vibration when operating on hard surfaces can affect operator comfort and overall machine performance. The Camso WHL 753R provides **improved ride quality** throughout its tread life.

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)



FORMERLY CAMOPLAST SOLIDEAL